



**ROLLFORCE
SERIES**

**THE WORD
IS SPREADING**

RROLLAND
TRAILERS

ROLLFORCE SERIES

ROLLAND KNOW HOW DEVELOPED THROUGH THE SPREADERS

The birth of the ROLLFORCE was through ROLLAND's expertise. Design, visibility, controllability, traceability, security, comfort and robustness were all leading factors in ROLLAND's creation.

THE INSIDE BODY HAS EVOLVED :

no angles for emptying, the chains are closer to the side, channel slats help a more efficient emptying, drive strengthened with wider bearing blocks.

ADAPTED SPREADING SOLUTIONS :

vertical beater frame and TCEi

MUD-GUARDS :

moulded to keep the machine clean

ROBUST SLURRY DOOR


without corners to restrict the flow

TOP RAIL

gives excellent rigidity to the sides and front panel (starts from RF5517)

HOSES COMPLETELY INTEGRATED

in 3 parts, protected with a steel cover, gives longer life and ease of maintenance

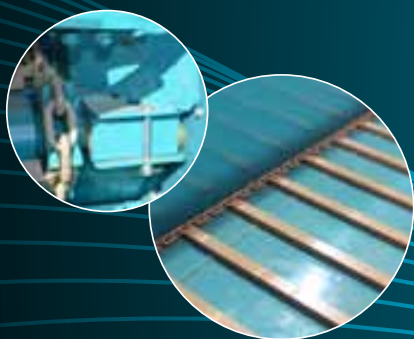

LOPED

FRONT PANEL
with wide vision
Showing inside and outside work

CUTTING EDGE EQUIPEMENT



FRONT HOOD
protects
all components

HYDRAULIC
slurry door indicator



**VERTICAL
DRAWBAR
SUSPENSION :**
with spring (standard)
or hydraulic (optional),
maximum comfort in the field
and on the road.

LIGHT COVERS
automatic for safety
on the road



**INDEPENDANT
HYDRAULICS :**
easy coupling,
non polluting and
reduces over heating.

HOSE CARRIER
positioned correctly

**"A" FRAME
DRAWBAR**
for strength and stability

HYDRAULIC JACK
integrated under the drawbar



DEMOUNT RING :
flat, swivel or spoon
options



ROLLFORCE SERIES

WHATEVER YOU SPREAD, WE HAVE THE SOLUTION


ROLLAND proposes several solutions for spreading fertiliser accurately without too much power. The ROLLFORCE spreaders offer 2 solutions : the Vertical auger range and the TCEi redesigned



Spread
patterns
tested by
IRSTEA



VERTICAL FRAME

Unique auger dynamically
balanced available
in 3 different heights

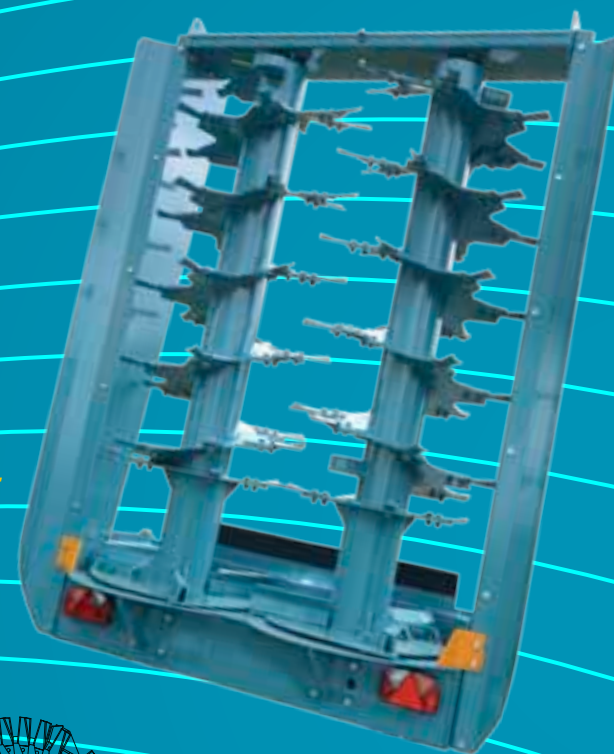


AGGRESSIVE PROFILE


Tried and tested
over the years, hard
wearing with
aggressive angle.

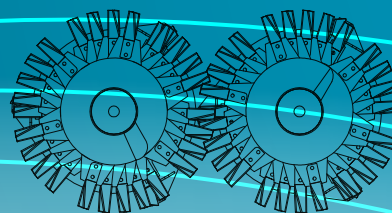

VI7 :
1.70 m



V21 :
2.10 m



V25 :
2.5 m



STRONG POINTS

TCEI SPINNING DECK

new rotors
and new style
discs with 3
or 4 deflectors

Tested by



HYDRAULIC HEADLAND kit for TCEi

SEAL
protecting gearboxes

FLEXIBLE COUPLING
for gearbox protection

**REINFORCED
GEARBOXES**
with tapered gears

AGRI FINISH
deck with monobloc
construction

EDT FINISH
wear strips removable,
reinforced gearboxes

CONTROL YOUR SPREADING PRECISELY



ELECTRIC CONTROLS BASE MODEL

Switch on bed, vary bed speed (screen in option)



ELECTRIC CONTROLS 3 FUNCTIONS

*Bed on/off, bed spread, bed reverse,
slurry door and rear hood or headland
management. (screen in option)*



ELECTRIC CONTROLS WITH DPA

*Auto bed speed variation
with forward speed*



ROLLAND WEIGH SYSTEM

*Measures precisely and
compliments traceability*



ROLLAND PC PACKAGE

With printer and software

ROLLFORCE SERIES

CHOOSE YOUR



JRS...



FEATURES	RF 5013	RF 5514	RF 5517	RF 6118	RF 6119	RF 6620	RF 6622
Heaped volume (m³)	13	14	17	18	19	20	22
Body length (cm)	500	550	550	610	610	660	660
Body width - Top / Bottom (cm)	184 / 146	184 / 146	181 / 146	181 / 146	183 / 146	181 / 146	183 / 146
Side height (cm)	123	123	155	155	170	155	170
Loading height with standard wheels (cm)	242	247	280	280	300	283	298
Total length (cm)	767	817	817	867	867	917	917
Total height with standard wheels (cm)	328	334	352	353	374	356	368
Potential In field carrying capacity (Kg)	12000	13000	15000	16000	17000	18000	20000
Approximate unladen weight (Kg)	5300	5820	5860	6400	6520	6660	7800
Beater option	V17, V21, TCEi	V17, V21, TCEi	V21, V25, TCEi	V21, V25, TCEi	V25, TCEi	V21, V25, TCEi	V25, TCEi
Chain size (mm)	2x16 (80) U70	2x16 (80) U70	2x16 (80) U70	2x16 (80) U70	2x16 (80) U70	2x16 (80) U70	2x16 (80) U70
Axle size (mm)	100	100	100	110	110	110	2 x 110





Since 1946, ROLLAND have been listening to the agricultural world and have evolved with their customers. The ROLLFORCE is ROLLAND's latests example. Today, the ROLLFORCE like the 10 other machines

which are produced each day will benefit from ROLLAND's ultra modern factory, with laser cut, robotic welding, shotblasting, degreasing, phosphating, finished with powder coating and oven curing to give an extremely high quality finish.

ROLLAND... A VISIONARY MANUFACTURER



ROLLAND
TRAILERS

ZA Les Landes
 29800 TREFLEVENEZ
 FRANCE
 Tél : 00 33 (0)2 98 85 13 40
 Fax : 00 33 (0)2 98 21 38 15
www.remorquerolland.com